


Switch Lock for Alarm System



Application

Key control for electrical circuits for alarm systems.

Operation

See Table.

Materials

Body, plug and ring: brass

Cam: steel

Pins: nickel silver and stainless steel

Standard finishes

Nickel satin, brass

Cylinder mechanism

Mul-T-Lock's unique, high precision pin tumbler system.

Keys



Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options

- Classic, Interactive®+ platforms
- Keyed different, keyed alike
- Master keyed
- '3 IN 1' (changeable combination)


Standards

UL437, ISI 950

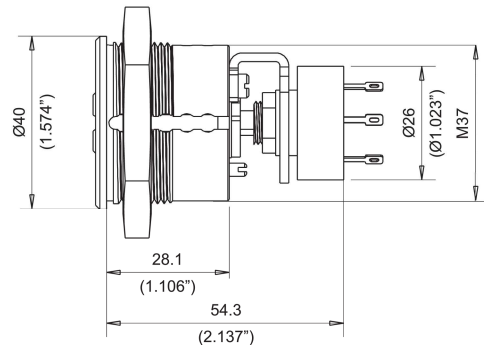


Key rotation	90°
Key removal	0°, 90°
Option	2 or 4 positions


30° indexing			
No. Poles	Model no.	Switch function	Terminals
DP	A204	4 positions	A,C,1-4,7-10
90° indexing			
No. Poles	Model no.	Switch function	Terminals
DP	A214	2 positions	A,C,1,4,7,10

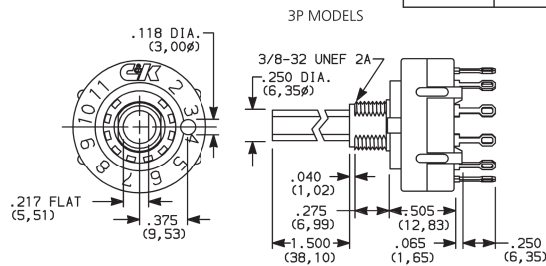

DP MODELS SCHEMATIC



(STD.) SOLDER LUG



Switch specifications

Type: C&K components 204, 214

Switch: 2.5 AMPS @125 VAC;

350 mA @ 125 VDC (UL/CSA)

Carry: 5 AMPS continuous

Electrical life: 15,000 make-and-break cycles

at full load up to 300,000 detente operations

Insulation resistance: $10^9 \Omega$ min

Dielectric strength: 1,000 VRMS min @ sea level

Contact resistance: Below 20 m Ω typ. Initial @ 2-4 VDC, 100 mA

TERMINAL NUMBERS

Terminal numbers molded on bottom of housing.

